



Antica e Titanzinc, gli smalti tecnici ad altissima adesione, presentano le loro selezioni di colori pronti e i tipi di finiture.

Antica, in particolare, conferisce una finitura come il ferro battuto a qualsiasi supporto in legno, lamiera, plastica, zinco e molti altri descritti nella scheda tecnica.

1000 e più colori sono realizzabili con il Sistema Tintometrico Colormaker nelle collezioni **Antica** e **Pro 800** di Colorificio Sammarinese.

La gamma dei prodotti/finiture è consultabile sul retro della cartella. Per conoscere l'offerta degli altri smalti per esterno e interno di Colorificio Sammarinese richiedere la cartella **Smalti e Omnia Smalto all'acqua**.

.....

*Antica and Titanzinc, the technical enamels with a very high adhesion, present their ready selections of colors and types of finishing.*

*Antica, in particular, gives a finish such as wrought iron to any support in wood, metal, plastic, zinc and many others described in the data sheet.*

*1000 and more colours are achievable with Colormaker Tinting System in Antica Collection and Pro 800 of Colorificio Sammarinese.*

*The range of products/finishes can be found on the back of the folder. To know the other of Colorificio Sammarinese solvent and water-based enamels for indoor and outdoor use, request the Smalti and Omnia folders.*

.....

I colori di questa cartella sono indicativi, i colori ottenuti con processo di stampa sono indicativi. La luce, il clima, l'uso possono causare variazioni di tonalità ai colori originali.

*The colours of the present colour card are purely indicative and they do not constitute an absolute corresponding reference. The print process, the light and the use can modify the original tones of the colour card.*

## Antica



colori pronti / ready mix




Antica GG Base solvente 13800002  
 Antica GG Base acqua 13810002  
 Antica GM Base solvente 13820003  
 Antica GM Base acqua 13830003  
 Antica GF Grafite 13800001

## Antica



colori pronti / ready mix

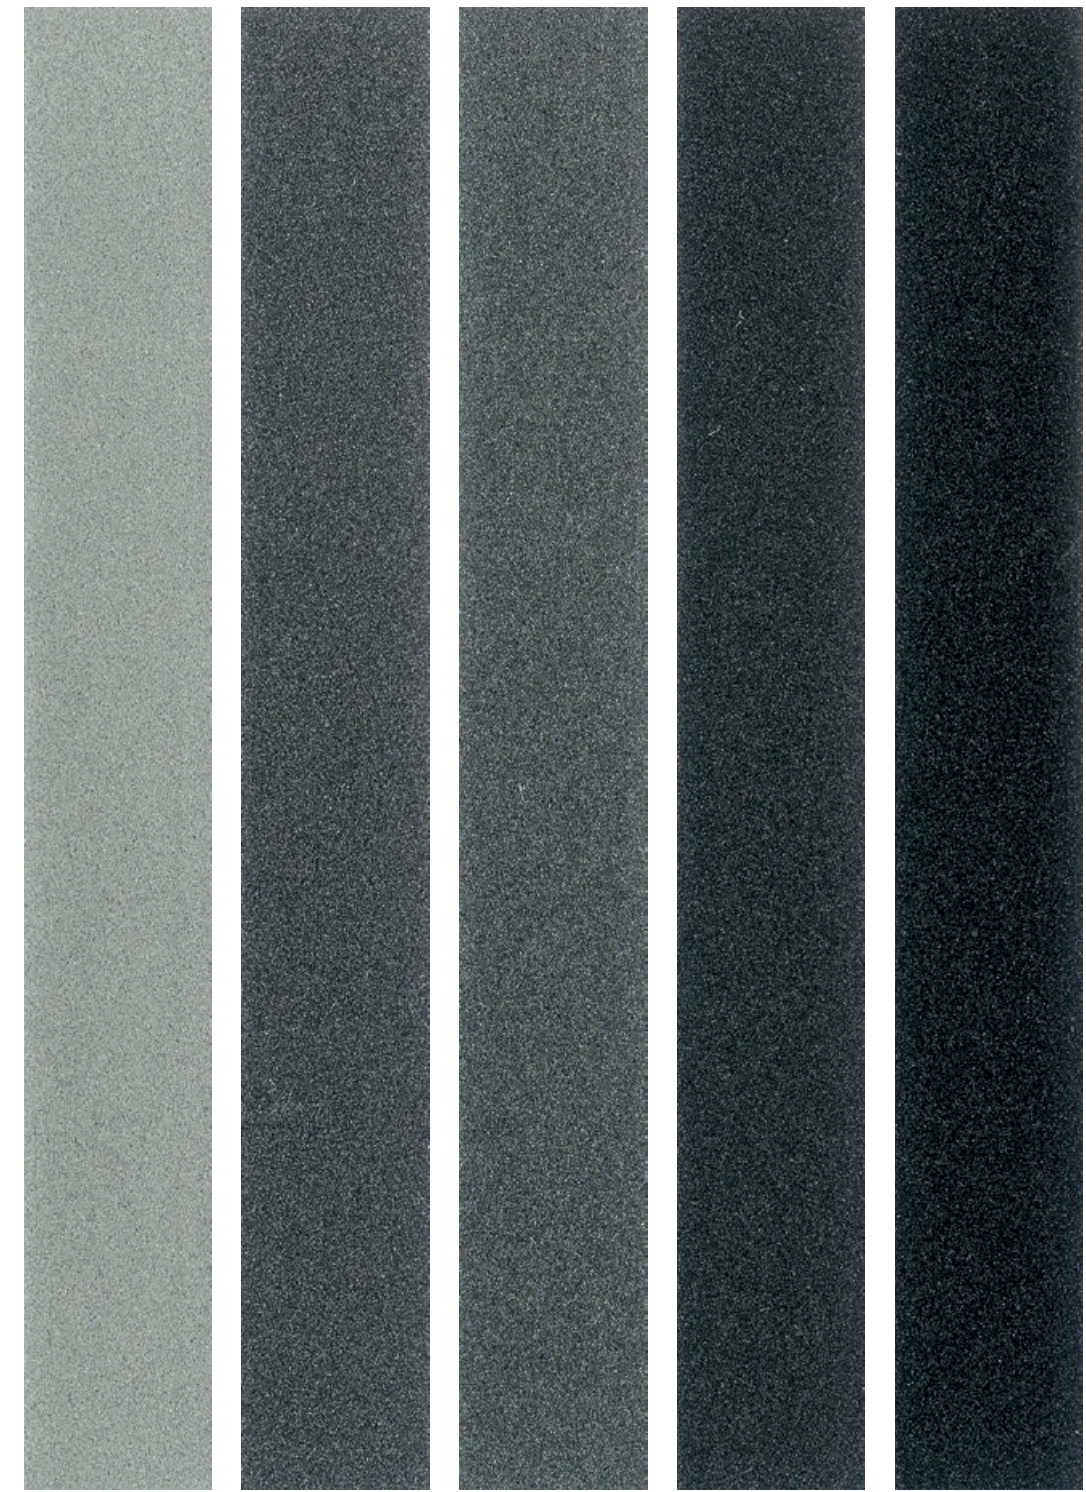

Argento GG 0300  
 Acciaio 0015  
 Ferro battuto 0432  
 Ferro antico 0433  
 Grafite pro 0417

## Antica



colori pronti / ready mix



Grigio ferro 0429  
 Ramato 0416  
 Verde 0435  
 Bronzo 0436  
 Colormaker Rosso 0418

## Titanzinc



colori pronti / ready mix



Bianco 0050  
 Verde 0190  
 Rosso ossido 0650  
 Rame 0600  
 Testa di moro 0627



## Antica + Titanzinc

Timbro/Stamp

## Antica



### Antica Smalto antiruggine decorativo finitura antichizzante

Smalto antiruggine decorativo a finitura antichizzante. Protettivo e impermeabile dona alle superfici l'aspetto del ferro anticato / ferro battuto. Formulato con ossidi micacei brillanti di alta qualità.

*Decorative antirust enamel to obtain an antiquing finish, as wrought iron. Protective and waterproof qualities, it gives to surfaces the appearance of antique iron. Formulated with bright high quality micaceous oxides.*

Diluizione	A pennello e rullo max 1% con 9120.0004, a spruzzo max 4% con 9120.0004
Dilution	By brush and roller max 1% with 9120.0004, by air-spray max 4% with 9120.0004
Resa / Yield	Resa teorica per mano 9 - 10 m <sup>2</sup> /l / Theoretical coverage for each coat 9 - 10 m <sup>2</sup> /l



### Antica all'acqua Smalto polivalente acrilico all'acqua

Smalto antiruggine decorativo a finitura antichizzante. Protettivo dona alle superfici l'aspetto del ferro anticato / ferro battuto. Formulato con ossidi micacei brillanti di alta qualità.

*Decorative antirust water-based enamel to obtain an antiquing finish, as wrought iron. Formulated with bright high quality micaceous oxides.*

Diluizione	A pennello, rullo max 5% con acqua, a spruzzo max 10 - 15% con acqua
Dilution	By brush, roller max 5% with water, by Air-spray max 10 - 15% with water
Resa / Yield	Resa teorica per mano 9 - 10 m <sup>2</sup> /l / Theoretical coverage for each coat 9 - 10 m <sup>2</sup> /l



## Titanzinc




### Titanzinc Smalto e primer satinato monomano per lamiera zincata

Eccellente per la verniciatura di lamiere zincate, grondaie, guard-rail. Adatto in industria per l'alta resistenza alle intemperie e alla salsedine.

*One-coat enamel, excellent for use in masonry and for galvanized sheet metal, gutters, guard-rails. It's suitable also for industrial use because of its high resistance to harsh climates and to saltiness.*

Diluizione	A pennello e rullo max 1% con 9120.0004, a spruzzo max 4% con 9120.0004
Dilution	By brush and roller max 1% with 9120.0004, by air-spray max 4% with 9120.0004
Resa / Yield	11 - 12 m <sup>2</sup> /l (allo spessore indicato nella scheda tecnica) / theoretical coverage (thickness specified by data sheet)



# Antica

SMALTO ANTIRUGGINE DECORATIVO  
FINITURA ANTICHIZZANTE  
DECORATIVE ANTIRUST ENAMEL - ANTIQUING FINISH

## + Titanzinc

